HE-VA Rolls

Vip- & Lift-Roller – So right!

HE-VA
ROLLS

VIP-ROLLER

The Vip-Roller embraces HE-VA technology in maximising its simple design. Superior performance, long life and reliability are built in.

Simple Design

This simple design means optimum performance, even with a tractor driver who has average skills.

Drawbar height adjustment

The drawbar height is easily adjustable with a simple stop bolt.

Rings are mounted on 60mm axles for strength and long life. The axles run on 4 bolt bearings, protected inside the U profile steel.

Contour Flexing

The Vip-Roller wings are connected to the centre section so they can pivot under control to follow the contours of the field.

Simple Locking, Safe Transport

The Vip design supports the side section horizontally in a positive locking cradle, which is safe during transport and storage.

The VIP Finish

Quick, Positive Folding

LIFT-ROLLER

Simple Design

The Lift-Roller gives you a quick, easy solution to moisture retention and/or protection against slugs.

Easy to lift, Safe to stand

The Lift-Roller is simple to operate, even for unskilled operators and has its own in-built stand which flicks into place for storage.

Lift-Roller is available in working widths of 2.6 and 3.0 metres.

All the right ring options

450 & 510 mm
AMBRIDGE RINGS -
tandard. 450 mm, 510 mm.
tandard with breaker ring)

620 mm
CAMBRIDGE RINGS -
Standard.
620 mm only for Lift-Roller
(standard with breaker ring)

1 piece CAM

2 piece CROSSKILL
485-530 mm.
550-600 mm only f/Lift-Roller

1 piece 2D-CORRUGATED
500 mm. 1 piece
600 mm only for Lift-Roller

1 piece PLAIN

Free Movement on the Drawbar

HE-VA always maintains that simple ideas prove the most effective solutions.

The bottom link arms carry a connecting bar, which has free movement enabling the Lift-Roller to follow field contours eliminating any possibility of strain on the frame.

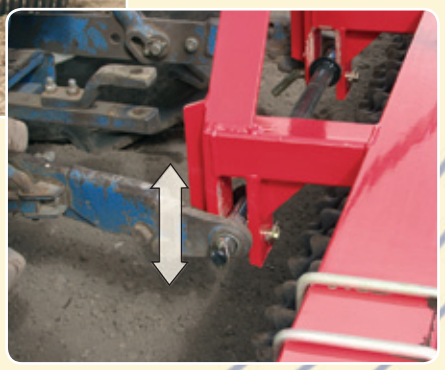

The LIFT Finish

The Lift-Roller is designed so the gap left by the bearing is covered by the tractor wheeling for full width, even consolidation.

HE-VA
ROLLS

HE-VA Rolls Vip- & Lift-Roller

TECHNICAL SPECIFICATIONS

RING TYPE		CAMBRIDGE					CAM	CROSSKILL	CORRUGATED	STAR
WORKING WIDTH	Ring Size	450 mm 510 mm 3 spokes		510 mm 560 mm 620 mm 5 spokes			550 mm	485/530 mm 550/600 mm	500, 550 & 600 mm 5 spokes	450/500 mm 550/600 mm
Vip-Roller 3.3 m / 3.7 m / 4.1 m / 4.5 m										
3.3 m TRANSPORT 2.32 m	WEIGHT KG	1410	1500	-	-	-	1090	1430	1470	1520
	RINGS	63	63	-	-	-	22	33	41	66
	AXLE (mm)	60	60	-	-	-	60	60	60	60
3.7 m TRANSPORT 2.32 m	WEIGHT KG	1530	1640	-	-	-	1150	1570	1610	1670
	RINGS	71	71	-	-	-	25	37	46	74
	AXLE (mm)	60	60	-	-	-	60	60	60	60
4.1 m TRANSPORT 2.32 m	WEIGHT KG	1740	1870	-	-	-	1330	1790	1830	1890
	RINGS	79	79	-	-	-	28	41	51	82
	AXLE (mm)	60	60	-	-	-	60	60	60	60
4.5 m TRANSPORT 2.32 m	WEIGHT KG	1890	2020	-	-	-	1450	1930	1980	2050
	RINGS	87	87	-	-	-	30	45	57	90
	AXLE (mm)	60	60	-	-	-	60	60	60	60
WHEELS: 10.0 / 80 x 12 – 10 PLY. Requires one single - and one double-acting oil outlet										
Vip-Roller 5.4 m / 6.3 m / 7.3 m / 8.2 m										
5.4 m TRANSPORT 2.45 m	WEIGHT KG	2420	2580	2780	-	-	1860	2470	2530	2610
	RINGS	105	105	105	-	-	36	54	69	108
	AXLE (mm)	60	60	60	-	-	60	60	60	60
6.3 m TRANSPORT 2.45 m	WEIGHT KG	2640	2830	3070	-	-	2000	2700	2770	2870
	RINGS	123	123	123	-	-	42	63	78	126
	AXLE (mm)	60	60	60	-	-	60	60	60	60
7.3 m TRANSPORT 2.45 m	WEIGHT KG	3220	3440	3720	-	-	2480	3300	3380	3490
	RINGS	143	143	143	-	-	48	73	90	146
	AXLE (mm)	60	60	60	-	-	60	60	60	60
8.2 m TRANSPORT 2.45 m	WEIGHT KG	3430	3670	3980	-	-	2590	3510	3600	3720
	RINGS	161	161	161	-	-	55	81	102	164
	AXLE (mm)	60	60	60	-	-	60	60	60	60
WHEELS:10.0/75x15.3,10 PLY (5.4 & 6.3 m). WHEELS:11.5/80x15.3,10 PLY (7.3 & 8.2m).Requires one single - and one double-acting oil outlet										
Lift-Roller 2.6 m / 3.0 m										
2.6 m TRANSPORT 2.6 m	WEIGHT KG	790	930	-	1160	1250	680	730 / 1050	830 / 860 / 880	980 / 1230
	RINGS	45	45	-	45	45	16	25	31	48
	AXLE (mm)	60	60	-	60	60	60	60	60	60
3.0 m TRANSPORT 3.0 m	WEIGHT KG	900	1060	-	1320	1430	820	830 / 1170	920 / 960 / 990	1110 / 1400
	RINGS	53	53	-	53	53	19	27	35	56
	AXLE (mm)	60	60	-	60	60	60	60	60	60

EXTRA EQUIPMENT FOR LIFT-ROLLER

The Lift-Roller is available with a Grass-Seeder Kit as well as a mounting set for Multi-Seeder.

The Grass-Seeder Kit consists of an adjustable long finger harrow in front of the rings for mixture of seeds with soil, a ø230 mm plain roller behind the implement in order to obtain a completely level and smooth surface and a mounting set for Multi-Seeder.

Due to our company policy of continual improvement we reserve the right to change specifications without notice. E.& O.E.

YOUR LOCAL HE-VA DEALER

HE-VA

N. A. Christensensvej 34
DK-7900 Nykøbing Mors
Tel: +45 9772 4288
Fax: +45 9772 2112

Email: info@he-va.com
Web: www.he-va.com

98001101. PRINTED IN DENMARK: www.typographic.dk